


1/8

Figure 1

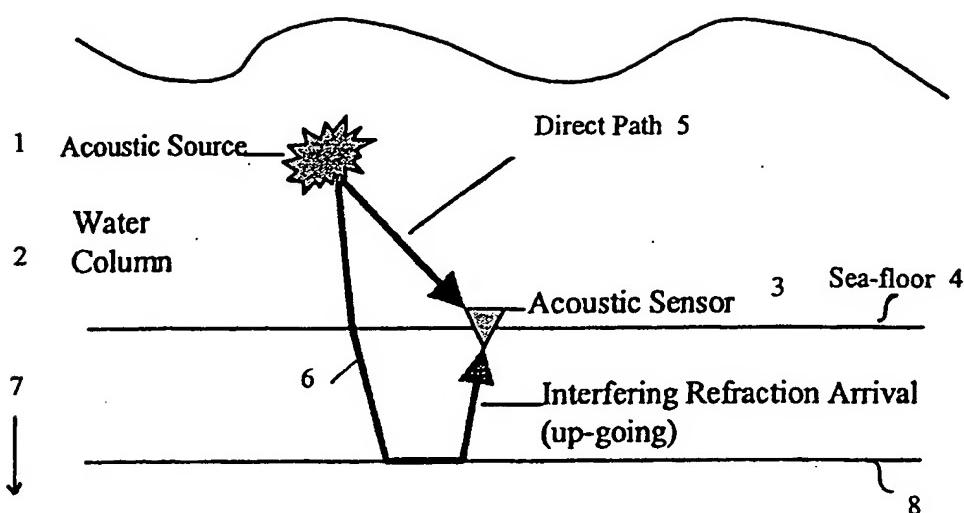

Distance Between Source and Receiver (offset)

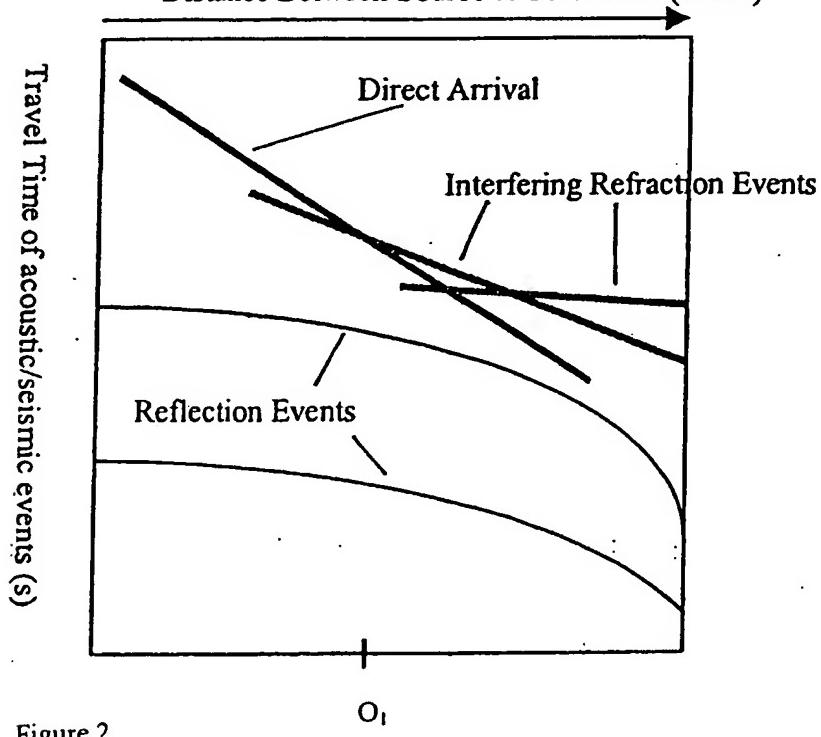


Figure 2


10/501 125

WO 03/058280

PCT/GB03/00050

2/8

Fig 3(a)

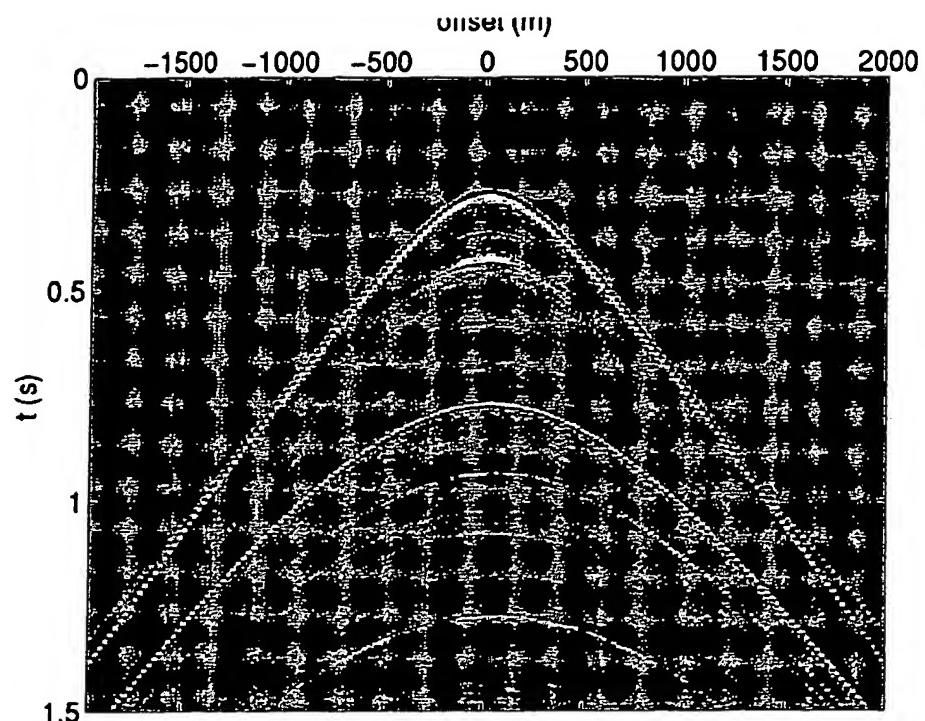

SUBSTITUTE SHEET (RULE 26)

BEST AVAILABLE COPY


10/501 125

WO 03/058280

PCT/GB03/00050

3/8

Fig 3(b)

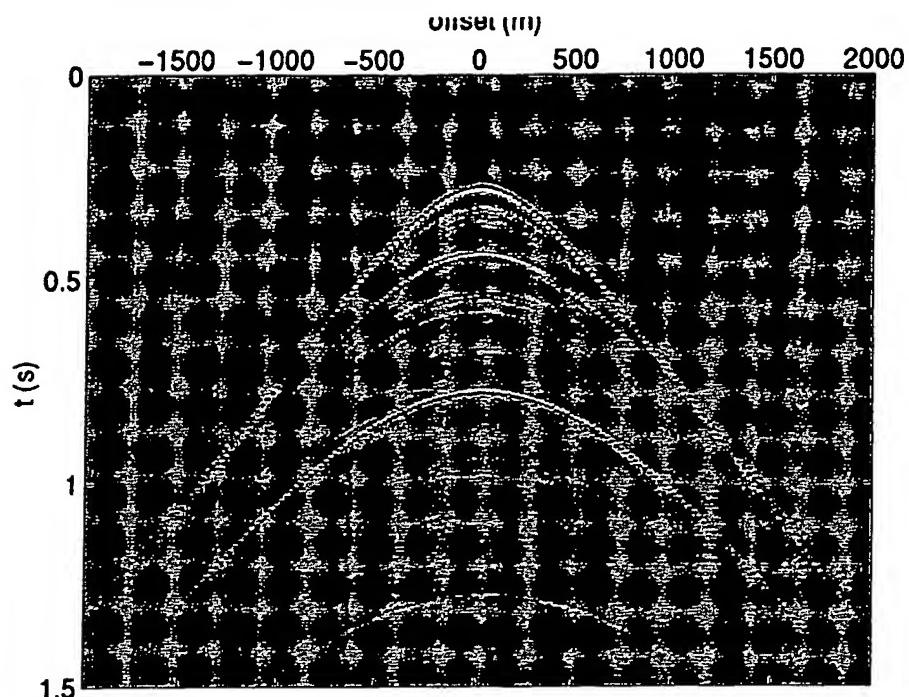

SUBSTITUTE SHEET (RULE 26)

BEST AVAILABLE COPY


10/501 125

WO 03/058280

PCT/GB03/00050

4/8

Fig 3(c)

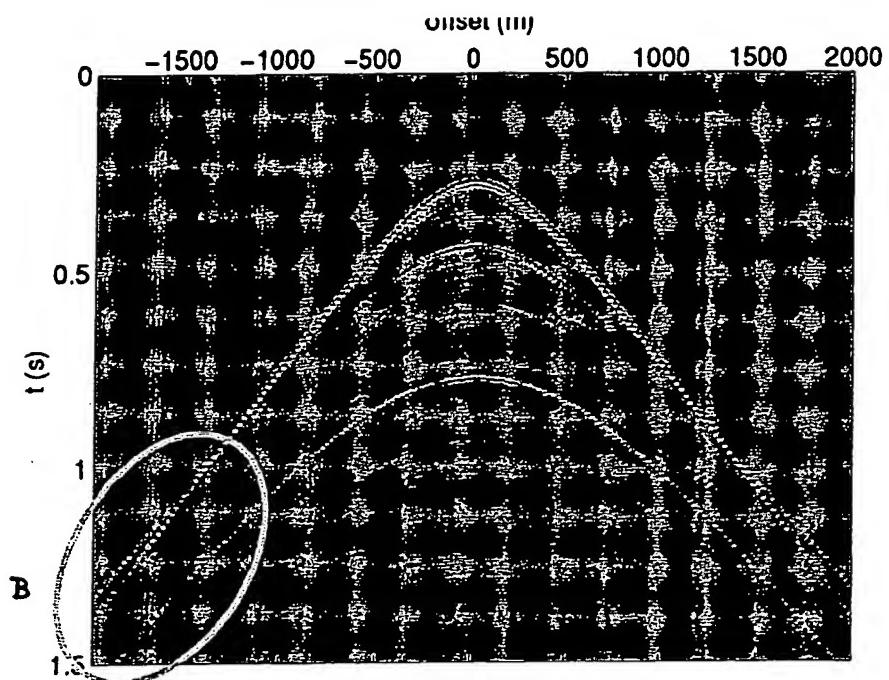

SUBSTITUTE SHEET (RULE 26)

BEST AVAILABLE COPY


604501125

WO 03/058280

PCT/GB03/00050

5/8

Fig 3(d)

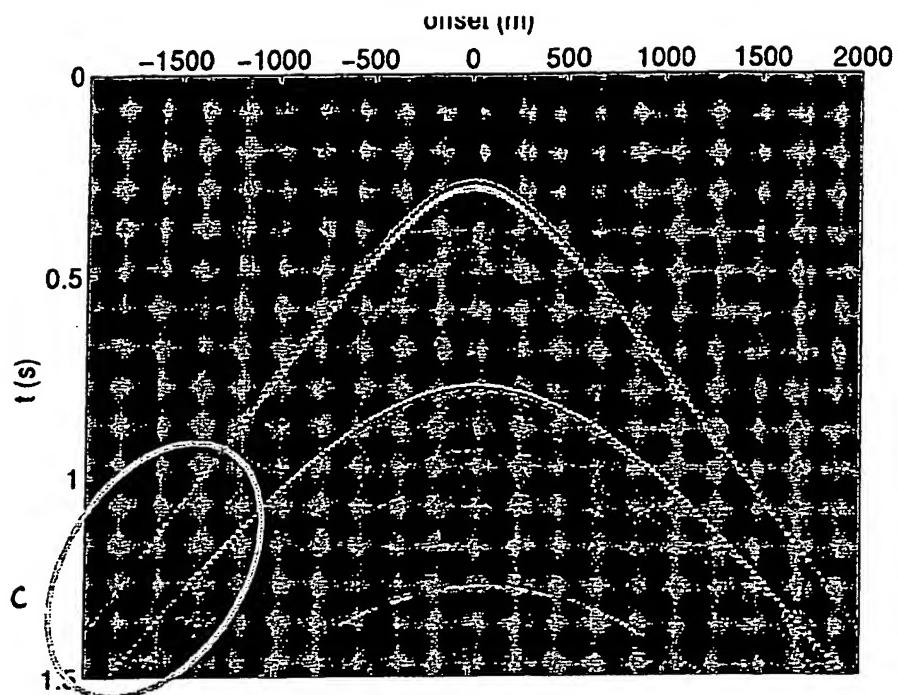


SUBSTITUTE SHEET (RULE 26)

BEST AVAILABLE COPY

6/8


Figure 4

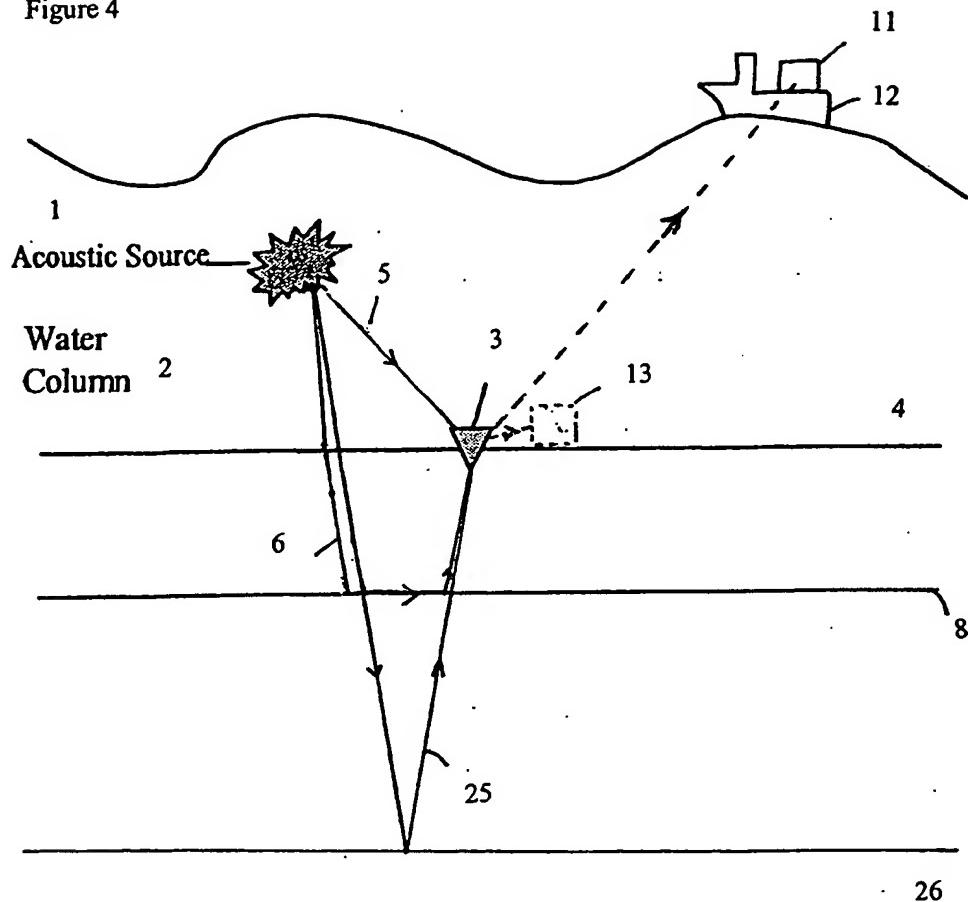

26

7/8

Figure 5

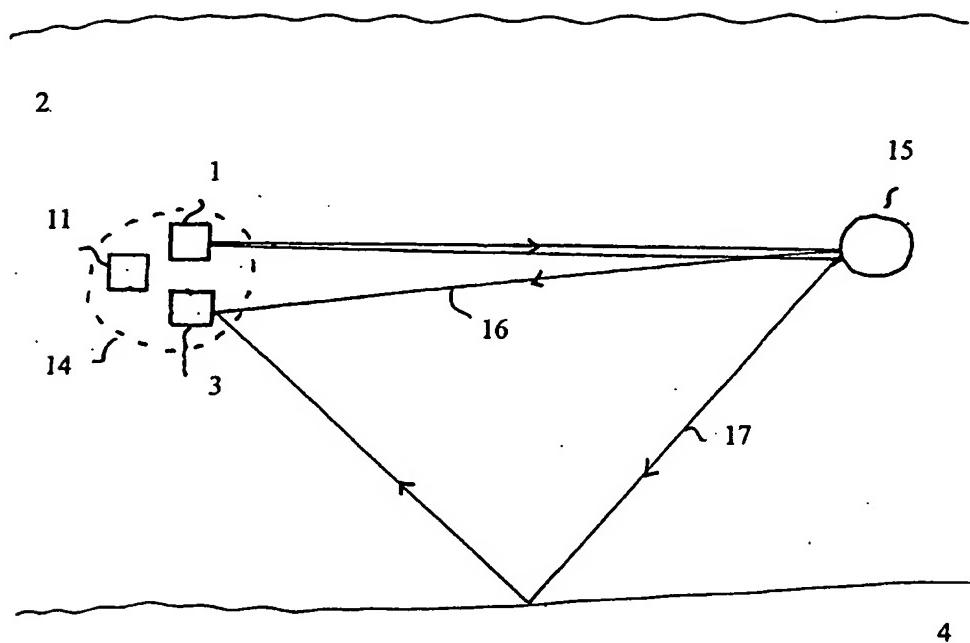

10/501 125

WO 03/058280

PCT/GB03/00050

8/8

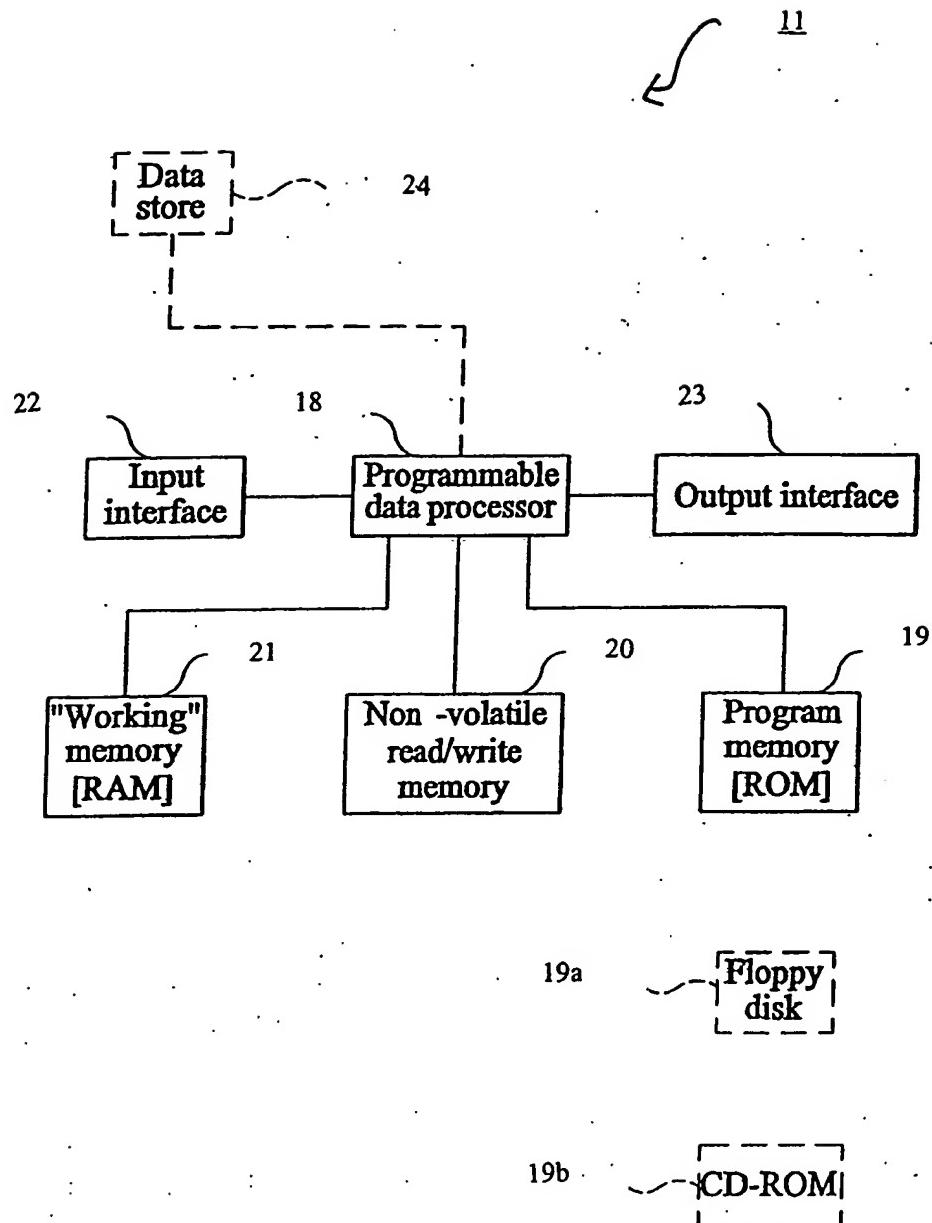


Figure 6

SUBSTITUTE SHEET (RULE 26)

BEST AVAILABLE COPY